

T68

Compact Utility, Series 4
67 hp



Packed with features to help accomplish your goals

The T68 is the result of TYM's decades-long experience in the agricultural equipment industry and the embodiment of TYM's philosophy on technology, design, and agriculture.



1. Tiger face front fascia



2. Battery shut-off switch



3. Electronic organ-type pedal



4. LED interior lighting



5. Differential lock system



6. External hitch control buttons




EU Stage V certified Deutz engine

Built with precision German engineering, Deutz engines offer high power and torque, even at low RPMs. Their longer lifespans and high reliability make them an ideal choice to boost productivity.



Wireless charger, cup warmer & cooler

The wireless smartphone charger and cup warmer and cooler provide comfort during long hours of work. (Available on select models only)

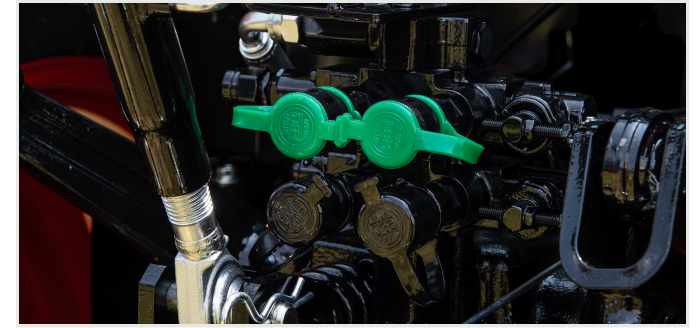

4-port rear hydraulic valves

The 4-port valve on the rear of the tractor allows easy control of implements with different functions.




Electronic hydraulic control system with BOSCH

The German-engineered BOSCH electronic hydraulic control system allows for easy control of the attachments and hydraulic functions like quick turns, horizontal auto-level, and sensitivity controls. (Available on select models only)



Comfortable suspension seat

Comfort suspension seats provide excellent ride quality and minimizes fatigue during long hours of operation.

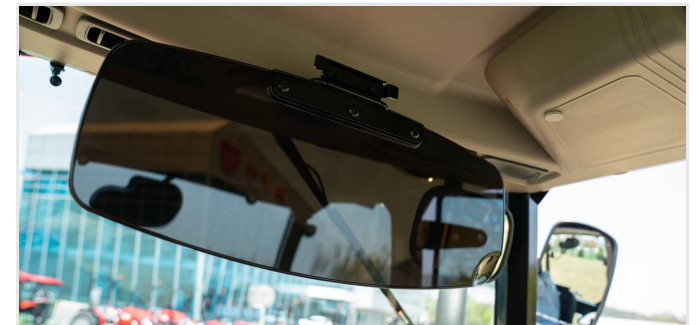

Sun visor

The sun visor ensures maximum visibility by preventing sun glare during daytime operation. (Available on select models only)

Technical specifications

ENGINE	
Engine manufacturer	Deutz TCD2.9L4
Type	Turbo charger
Gross engine power	67 hp
PTO power	61.9 hp 46.1 kW
Rated engine speed	2200 rpm
No. of cylinders	4
Displacement	176.97 cu. in. 2900 cc
Air cleaner	Dual Dry
Alternator	12V, 95A
Fuel system	CRDI
POWERTRAIN	
Transmission type	Synchro Power shuttle
No. of speeds	F24 x R24
Max. traveling speed	24.7 mph 39.7 km/h
Brakes	Wet, Multi-disc
Steering	Hydrostatic
Clutch	Dry Single Plate
CAPACITIES	
Fuel tank	18.48 gal 70 L
Coolant	11.2 qt 10.6 L
Crankcase	8.98 qt 8.5 L
Transmission/Hydraulics system	11 gal 42 L
Front axle	4.3 gal 16.3 L

PTO	
PTO type	Independent
PTO control	Electric/Hydro
PTO rear	540/750/1000
HYDRAULIC SYSTEM	
Pump type	Dual Gear Pump
Implement flow	10.3 gpm 39.1 lpm
Steering flow	5.8 gpm 22 lpm
Total flow	16.1 gpm 61.1 lpm
Category, 3-point hitch	II
Hitch lift capacity	4270 lb 1937 kg
Hitch lift capacity at 24 inches behind link ends	3153 lb 1430 kg
Lift control type	Position/Draft
No. of standard remote valves	4/4
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	155.6 in. 3952 mm
Overall width	72.44 in. 1840 mm
Wheelbase	84.65 in. 2150 mm
Height to top of cabin	103 in. 2615 mm
Min. ground clearance	17.1 in. 435 mm
Min. turn radius with brakes	141.3 in. 3590 mm
Min. turn radius without brakes	162.2 in. 4120 mm
Weight	5555.65 lb 2520 kg
STANDARD TIRES	
R1 Agricultural - Front	11.2-20
R1 Agricultural - Rear	14.9-30

Upgrades for the Series 4, T68

Complement the capabilities of your TYM tractor with compatible accessories and options.

Accessories

Front counterweights



Options



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world